

# ReticleSense® Auto Multi Sensor™ (AMSR)

AMSR

○ Speed vibration, leveling and humidity measurements with all-in-one measurement device. Improve yields.



Leveling

+



Vibration

+



Humidity



## Speed equipment qualification with wireless measurements.

- Collect and display acceleration, vibration, leveling and humidity data.
- Monitor humidity in reticle environments.
- Use the Auto Multi Sensor with MultiView™ and MultiReview™ software for real-time equipment diagnostics.
- See the effects of adjustments in real-time, speeding equipment alignment and set-up.

## Shorten equipment maintenance cycles with reticle-like form factor.

- 6" reticle sensor travels anywhere a reticle goes.
- Keep the process areas unexposed to the fab environment with vacuum compatible AMSR.

## Lower equipment maintenance expenses and enhance process uniformity with objective and reproducible data.

- Take the human element out of adjusting your equipment with objective measurements for multiple applications in one.
- Make the right adjustments time after time.
- Receive early warning for impending equipment failures and optimize your preventative maintenance plans.

**Semiconductor fabs and OEMs worldwide value the accuracy, precision and versatility of the ReticleSense AMS - The most efficient and effective wireless measurement device for leveling, vibration and humidity.**




**Save Time. Save Expense. Improve Yields.**

**CYBEROPTICS®**

# Features

<b>Wireless, reticle-shaped and battery-powered</b>	Available in 6" reticle shaped form factor
<b>Easy-to-use software</b>	MultiView and MultiReview software included MultiView: Displays real-time visual feedback. Digital readout allows more precise adjustment MultiReview: Replays log file data for review and analysis
<b>Highly accurate - leveling</b>	Horizontal accuracy : +/-0.03 deg within +/- 7 deg from absolute Horizontal resolution: +/-0.002deg within +/-14 deg. Reports inclination in two dimensions: x and y
<b>Highly accurate - vibration</b>	Reports accelerations in three directions: x, y, and z and RMS display allows quick, objective measurements. Operating range: +/- 4 G.
<b>Relative measurements</b>	Zero position may be set to any reference plane within the system's operating range for easy relative measurements
<b>Humidity accuracy</b>	+/- 2% RH
<b>Humidity measurements</b>	1 Relative Humidity (RH) sensor
<b>Housing</b>	Reticle quartz housing compatible with most all mask equipment and scanners.
<b>Lightweight</b>	340g (+/- 15g)
<b>Thickness</b>	6.35mm; standard 6" reticle format
<b>Operating pressure</b>	<10e-6 to 760 torr
<b>Operating temperature</b>	20 to 80 degrees C for extended periods. Up to 130 degrees C for shorter periods.
<b>Battery-operation</b>	>1 hour per charge. Inductive wireless charging and handsfree operation.
<b>WaferSense Link</b>	Bluetooth, 2.4 GHz, USB 1.1, dimensions 92mm x 58mm x 28mm
<b>Operating Systems</b>	Windows 7, XP and Vista
<b>Product components</b>	Auto Multi Sensor measurement device, charging clean box, carrying suitcase, USB communications link module and application software
<b>Calibration</b>	Factory recalibration recommended annually

## Dimensions

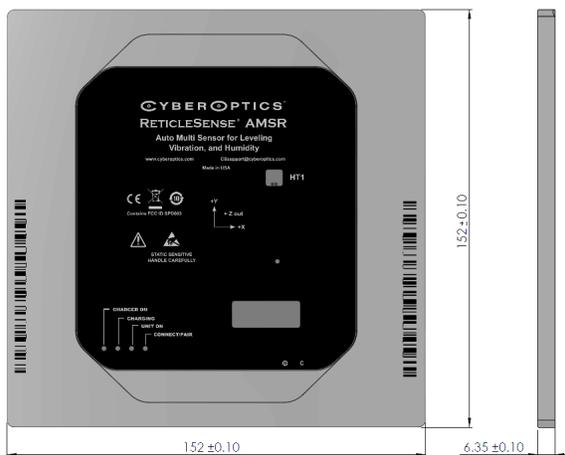

**CYBEROPTICS®**

Contact CyberOptics today for your complimentary on-tool demonstration  
+1 800.366.9131 or +1 763.542.5000 | CSsales@cyberoptics.com | www.cyberoptics.com

Copyright © 2018. CyberOptics Corporation. All rights reserved. Specifications subject to change without notice. 8023019 Rev E